

Coaxial Fixed Attenuator

RFHB04XXNC50-A



Rev 3


DC-4 GHz, 1-50 dB, 50 Watts, N, Bidirectional

| Electrical | | | | |
|-----------------|---|------|------|-------|
| Impedance | 50 ohm | | | |
| Frequency Range | DC-4 GHz | | | |
| VSWR | 1.2 max | | | |
| Input Avg Power | 50W@ 25 $^\circ C$ ambient, derating linearly to 5W at 100 $^\circ C$ | | | |
| Peak Power | 1kW (5 micro-sec pulse width, 2% duty cycle) | | | |
| Direction | Bidirectional, N female to N male (other configurations available) | | | |
| Attenuation(dB) | 1-10 | 20 | 30 | 40,50 |
| Accuracy(dB) | ±0.4 | ±0.5 | ±0.7 | ±0.7 |

Mochanical

| Mechanical | Environmental | | |
|----------------|------------------------------------|---|---------------------------|
| Connector Body | Ternary alloy plated brass | Operating Temperature | -55 ℃ to 100℃ |
| Heat Sink | Black anodized aluminum | Black anodized aluminum Storage Temperature | |
| Center Contact | Gold plated beryllium copper/brass | lated beryllium copper/brass RoHS | |
| Net Weight | About 350 g | Temperature Coefficient | <0.0004 dB/dB/℃ |

Dimensions(mm)

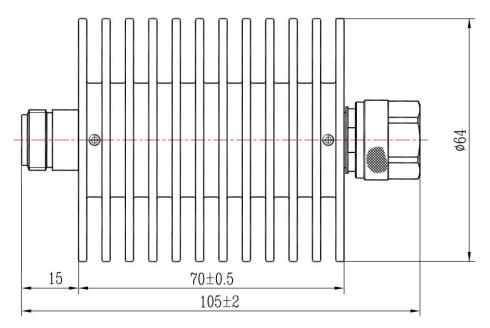



Notes

1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C. 2.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFHB04XXNC50-A

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration: A=female for two ends; B=male for two ends

C=female for one end and male for the other.